


Astoria Nop

Classic style with legendary resilience and performance

Astoria is suitable for all heavy traffic areas indoors as well as outdoors with an overhang. The heavy fiber and dense construction will prevent this mat from crushing. Its 37 oz. construction, makes it easy to handle at installation, or when being moved for cleaning as loose matting. This material is not affected by extreme climate conditions.

- UV stable dense 37oz. construction
- Can be cut into any shape without edge ravel
- Great choice for logo and plain mats

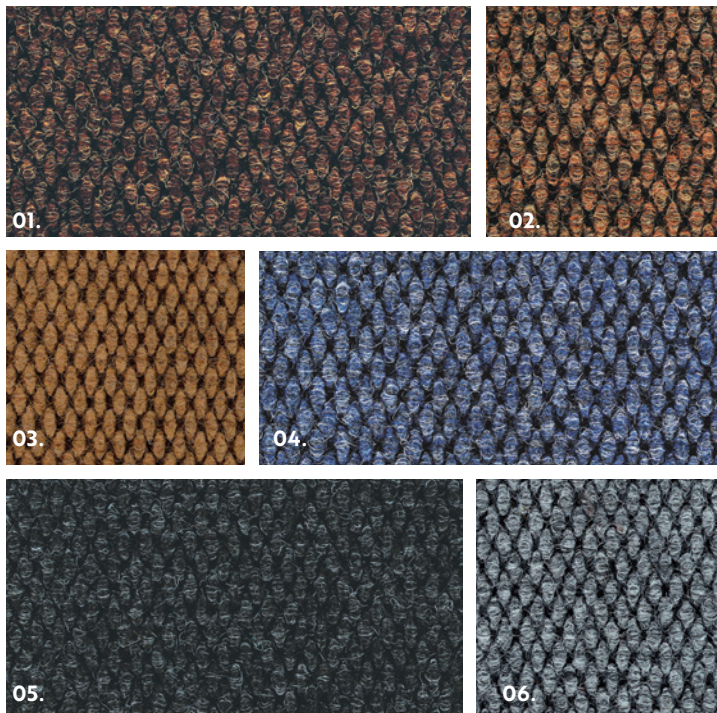

01. Walnut FN21 02. Zinc FN13 03. Sisal FN199 04. Steel Blue FN28
05. Charcoal FN19 06. Sterling FN05



portico
SYSTEMS

Solutions that Simplify.


1+ 877 285 8899 · www.porticosystems.com



Carpet/Roll Goods

Astoria Nop

Astoria Nop



> 37 OZ. NEEDLEPUNCHED CONTRACT CARPET

SUGGESTED USES

Office Environments, Runners, Conference Rooms, Lobbies, Libraries, Retail/Department Stores, Entryways, etc.

| | |
|------------------------|---|
| Manufacturing Process: | Non-woven/needlepunched |
| Surface Aspect: | Hobnail (berber) pattern |
| Fiber: | 100% Solution-dyed UV stabilized ASOTA® polypropylene |
| Backing: | Premium composite rubber |
| Pile Height (± 0.5mm): | 0.125" |
| Total Height (± 7.5%): | 0.375" |
| Pile Weight (± 7.5%): | 37 oz/sy |
| Total Weight (± 7.5%): | 64 oz/sy |

LIMITED WARRANTY

| | |
|--------------------------|---------|
| Full Commercial Warranty | 5 years |
| Summary of Warranty | |

Products must be professionally installed to validate the warranty. Portico Systems warrants Astoria Sheet/Roll Goods against wear for a period of 5 years in a commercial application. This warranty applies only to material that is properly installed and maintained, while being used as intended and recommended. If the defect is covered by this warranty and is reported to Portico Systems within the Warranty period, Portico Systems will supply new material of same or similar grade to repair or replace the defective material.

- **Wear**
Defined as complete removal of wear layer, pattern and color due to wear from normal traffic and maintenance. If the wear occurs within 5 years from date of purchase, Portico Systems will provide replacement materials or repair, of only the effected area.
- **Manufacturing Defects**
Portico Systems warrants Astoria materials are free from manufacturing defects and will replace defective floor covering and reasonable installation costs for a period of up to one [1] year from date of purchase. Portico Systems will not pay labor costs to repair or replace materials that defects were apparent before or at the time of installation.
- **Other Limitations**
 - This warranty is non-transferable
 - Manufacturing defect must be reported within 3 months from date of purchase.
 - This Warranty covers only properly installed & maintained floors
 - Portico Systems excluded and will not pay for any consequential or incidental expenses.
 - Portico Systems reserves the right of final judgment and may refuse claims in certain instances.
 - For a copy of the full warranty please ask for a warranty sheet

PACKING & DIMENSIONS

| | |
|--------------------------|-----------------|
| Sheet/Roll Width (± 2%): | 6' 7" or 13' 2" |
|--------------------------|-----------------|

TECHNICAL SPECIFICATIONS

| | |
|--|---------------------|
| Dimensional Stability (ASTM D7570-09): | Pass |
| Electrostatic Propensity (EN 1815): | >2kV |
| Electrical Resistivity (IBM / ICL): | Pass, for R.H. ≥40% |
| Sound Insulation (ISO 10140-1:2010): | ≥21dB |
| Thermal Retention (ISO 11092): | 0.15 m K/W Pass |

COLOR FASTNESS

| | |
|---------------------------|--------------------|
| To Light (ISO 105 B02): | 5 |
| To Water (ISO 105 E01): | 5 |
| To Shampoo (ISO 105 C06): | 4-5 |
| To Rubbing (ISO 105 X12): | 4 (Dry), 3-4 (Wet) |

FLAMMABILITY RATING

| | |
|---|---------------------------------------|
| Smoke Density (ASTM E662) | Pass |
| Surface Flammability (FF 1-70 / ASTM D2859) | Pass |
| LEED-NC | MR Credit 4 IEQ Credits 4.1, 4.3, 5 |

MAINTENANCE

Regular vacuuming (Weekly in low-traffic areas, and daily or twice daily in areas with higher traffic) with a motor-driven brush and beater bar can remove up to 80% of surface dirt, and is the easiest way to prolong the life of your carpet.

Regular vacuuming is key to maintaining your carpet, but eventually the carpet color dulls from dirt and grime stuck in the fibers. The dirt is then carried further into the building to form more soil reservoirs. Additionally, the oil content (15%) of the soil causes particles to stick to carpet fiber and resist vacuuming. To restore the carpet to its best condition, frequent light cleaning gives the best result and is often very cost effective.

IMPORTANT NOTICE

Sample swatches have been cut from an overall design; decoration and shade may vary.

YOUR AUTHORIZED SALES REPRESENTATIVE:



experience it for yourself
Talk with your sales representative or request samples at samples@porticosystems.com

Solutions that Simplify.

1+ 877 285 8899 • www.porticosystems.com