




product specifications


premier grid

carpeted grid matting system

GRID SPECIFICATIONS	STANDARD/NORMS	DATA
Composition		Flexible injection-molded PVC
Grid Thickness		15/32"
Overall Thickness		5/8"
VINYL PROPERTIES		
Hardness, Shore 'A'	ASTM D2240-86	85
Specific Gravity	ASTM D792	1.34
Tensile Strength	ASTM D412	2640 psi
Elongation % at Break	ASTM D412	365 psi
100% Modulus	ASTM D412	1339 psi
Tear Strength	ASTM D624	362 psi
Low Temperature Brittleness	ASTM D11	-37° C
Static Coefficient of Friction	ASTM D2047	Dry Leather: 0.79 Wet Leather: 1.04 <i>Values >0.5 are considered slip-resistant.</i>
CARPET PROPERTIES		
Carpet Fiber		100% engineered polypropylene Dense cut pile construction
Face Weight		26 oz/sy
Denier		2750
Backing		Vinyl and hook-and-loop fastening system
ALUMINUM PROPERTIES		
Optional Aluminum Frame Composition		6063 - T5
Lineals, Dividers & Ramps		Outdoor, all-weather anodized aluminum

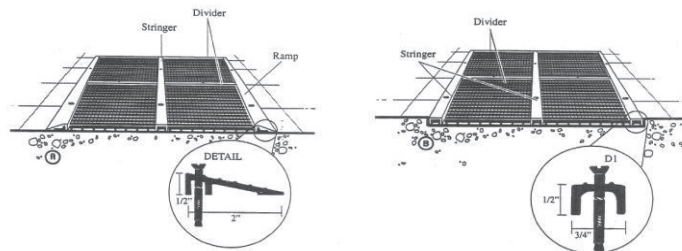

Aluminum profiles:

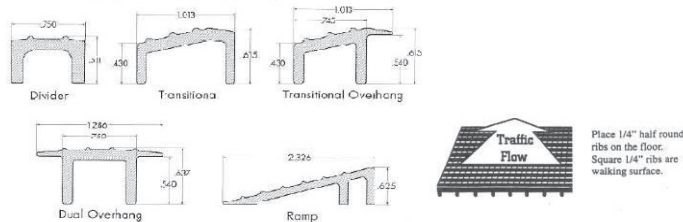

U.S. Pat. No. 4796339