SafeStep Plus

Designed for comfort and safety in wet, heavy-traffic kitchen & bar environments.

Slip and stain-resistant, non-absorbent, anti-fatigue and non-reactive to chemicals, animal fats or grease: SafeStep Plus brings non-slip flooring to the next level.

- · Resistant to mildew and other bacterial growth.
- Reinforced with random short staple PET fiber, SafeStep Plus is both puncture and impact resistant.
- · Made from 90% post-industrial recycled materials.
- · Best alternative to kitchen tiles.
- Flexible, anti-fatigue flooring protects your employees fatigue from standing, while keeping noise levels in the kitchen to a minimum.
- · Certified by the National Floor Safety Institute.




- 01. Slate
- 02. Charcoal
- 03. Pewter
- 04. Mesa
- 05. Mocha



PORTICO

Flooring Solutions that Simplify. 1+ 877 285 8899 · www.porticosystems.com

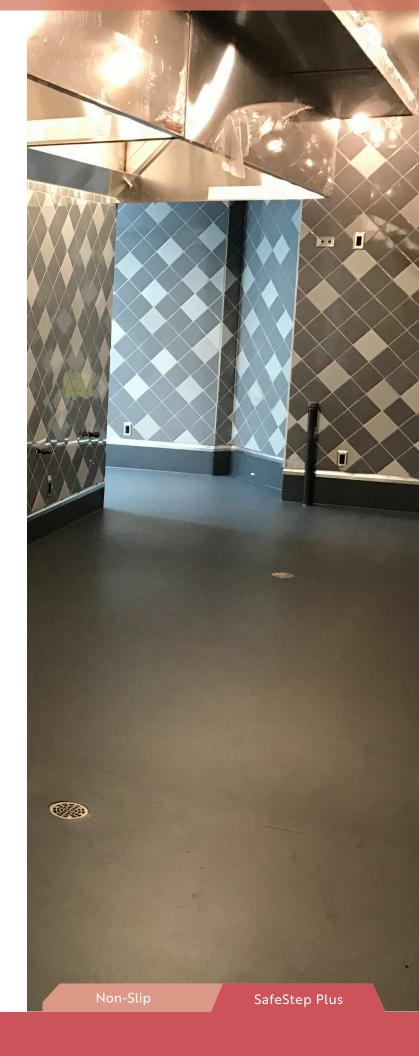

SafeStep Plus







> RECYCLED NON-SLIP FLOORING

SUGGESTED USES

Animal Care Facilities, Clean rooms, Commercial Kitchens, Commercial Refrigerators, Data Rooms, Gymnasiums, Hospital Rooms, Locker Rooms, Patient Waiting Rooms, etc.

SPECIFICATIONS

Material: 90% Post-Industrial Recycled Homogeneous PVC
Overall Thickness: 1/4"
Sheet Size: 5′ x 8′
Weight (ASTM D751): 25.16 oz./sq. ft.
Bacteria & Mildew Resistance (ASTM G21): Excellent

Coefficient of Friction (ASTM D2047): AVG: 1.31 (Dry), 1.07 (Wet)

LIMITED WARRANTY

10 years Ask for warranty sheet for details

TESTING RESULTS

Bacteria & Mildew Resistance (ASTM G21)

Shore 'A' Hardness

Breaking Strength (ASTM D751)

Tensile Strength:

1600 psi Compressive Strength Elongation 185%

Tear Strength (ASTM D751)

Coefficient of Friction (ASTM D1894-08)

@20% Deformation (ASTM D695)

Excellent

405 lbs. (md), 723 lbs. (cmd)

76.5 lbs. (md), 84 lbs. (cmd)

1.31 (Dry), 1.07 (Wet)

FLAMMABILITY RATING

Fire Test Rating NFPA Type 1
Critical Radiant Flux (ASTM E648) 1.05W/sq. cm
Burn Distance (ASTM E648) 12 cm
Oxygen Index 29.0

ENVIRONMENT

Portico Systems does not use any substances currently included in the SVHC (Substances of Very High Concern) list under REACH (Registration, Evaluation, Authorization and Restriction of Chemical substances) in any matting products. All PVC grid products are 98% recyclable.

MAINTENANCE

Heavy Grease and High Traffic Areas:

Sweep-clean the floor after installation and clear area of scrap materials. The floor can be saturated and then deck brushed, power washed, or power scrubbed (only us the 3M Green Cleaning Pad) to remove construction debris.

NOTE: No matter the flooring type, in high grease and high traffic areas, you cannot "mop" a floor clean. Mop heads can only soak up so much grease and oil before they become useless (2-3 cleaning cycles). After that time frame, mops only redistribute the same bacteria-filled grease and oil. Therefore, we recommend that you switch to deck brushes and squeegees to remove the soiled solution.


Only use clean deck brushes to apply the degreaser/cleaner. NEVER use solvent-based products such as oven cleaner, acetone, lacquer thinner, paint thinner, THF, MEK, etc. to clean SafeStep Plus products.

INSTALLATION

SafeStep Plus can be installed on most types of clean, dry, level and hard substrates. SafeStep Plus may be used for both interior and exterior applications. For more information on how to install SafeStep Plus in your space, contact your Portico Systems sales representative.

Notes:	

YOUR AUTHORIZED SALES REPRESENTATIVE:

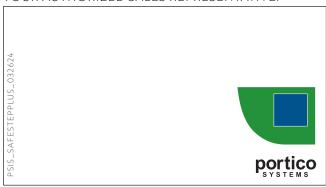

experience it for yourself

 ${\it Talk\ with\ your\ sales\ representative\ or\ request\ samples\ @porticosystems.com}$