


# Elements 950 Series

*Elements 950 Series absorbs noise while standing up to the heaviest of gym equipment.*

Elements 950 Series is sound absorbent, impervious to moisture, and has antimicrobial properties. It utilizes 100% recyclable rubber tires and post-industrial EPDM color chips that make it environmentally friendly and durable.

- The highest quality rubber gym flooring available
- Our rubber flooring is FloorScore certified building project
- Easy Maintenance

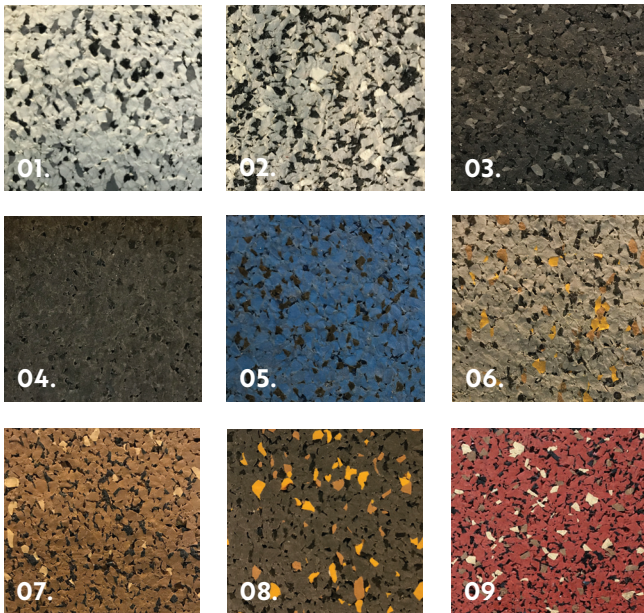

01. Metal In Mud 424-2    02. Avalanche 424-7    03. Granite Grey 424-73  
04. Volcanic Ash 424-54    05. Gulf Blue 424-51    06. Volcanic Flow 424-10  
07. Grizzly 424-17    08. Shooting Star 424-52    09. Tempe Sunset 424-19

The 950 Series has three colors that are **STOCKED**.


- Avalanche 424-7
- Granite Grey 424-73
- Grizzly 424-17

All other colors listed are custom and have minimums, plus longer lead times.



**portico**  
SYSTEMS

**Flooring Solutions that Simplify.**  
1+ 877 285 8899 • [www.porticosystems.com](http://www.porticosystems.com)

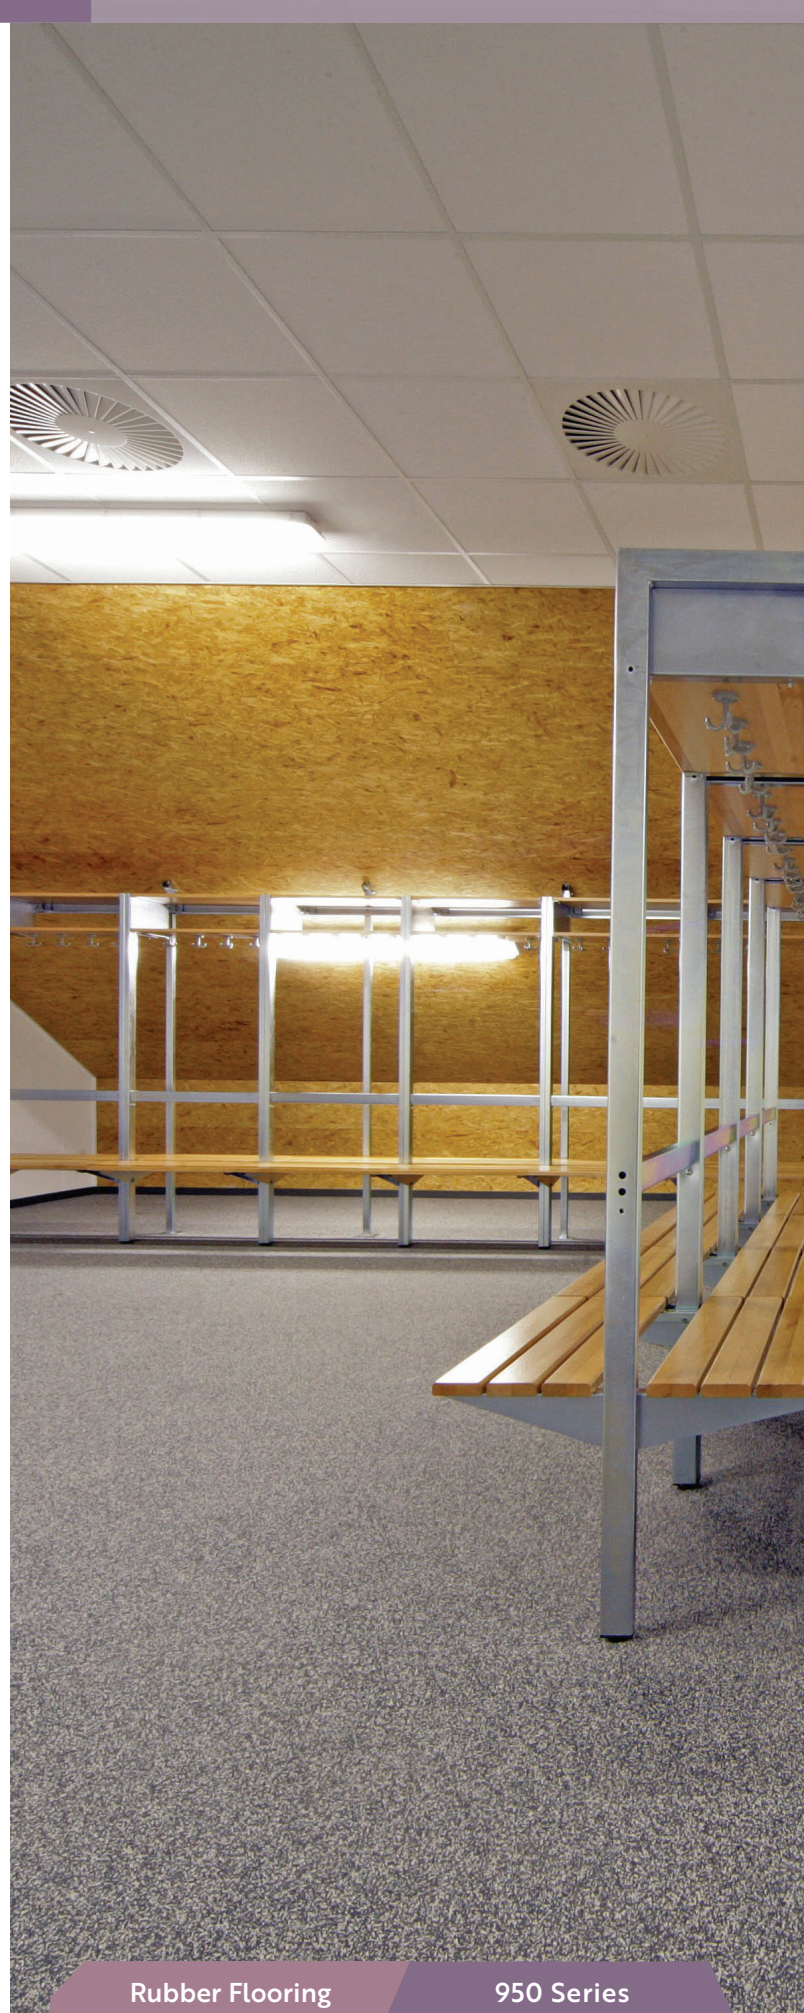

Rubber Flooring

950 Series

# Elements 950 Series

< 95% COLOR | 5% BLACK



## SUGGESTED USES

Weight Rooms, Home Gyms, Fitness Centers, Health Clubs, Recreation Centers, Golf Shops and Golf Courses, Schools and Universities, Play Areas, Day Care Centers, Fire and Police Stations, Physical Therapy Centers, Ice skating facilities, etc.

Construction (ISO 2424):

SBR Rubber Black + 95% Color EPDM/Recycled Rubber

Density (ASTM D3676):

60 pcf - 80 pcf

Hardness (ASTM D2240 (Shore A):

60 ± 5

Tear Strength (ASTM D624):

70pli - 80 pli min.

Elongation (ASTM D412):

> 145% - 300%

Tensile Strength (ASTM D412):

200 psi - >220psi

Flexibility (ASTM F137 1/4" Mandrel):

Pass

Resistance to Chemicals (ASTM F825):

No Change

Force Reduction (ASTM F2772):

12.9% - 13.7%

Energy Restitution (ASTM F2772):

85% - 86%

Abrasion Resistance (ASTM D3389):

<1.7g. 1000 cycles

Static Load Limit (ASTM F970):

0.001' @ 250 PSI

Coefficient of Friction (ASTM D2047):

>0.95

Slip Resistance (ASTM F2772):

Pass

VOC Compliant (ASTM D6116 / CA 1350):

Yes

Rolling Load (EN1569):

Pass

Resistance to Impact (EN1517):

14 N/m

Resistance to Identification (EN1516):

0.1mm

Vertical Deformation (ASTM F2772):

1.4mm

Indoor Air Quality (CA Spec 01350):

Pass

Coefficient of Friction (ASTM D2047):

> 0.96

## PACKING & DIMENSIONS

The 950 Series colors listed are custom and have minimums, plus longer lead times. Contact your representative for more information.

Size	Colors	Thickness
Roll Goods 4' wide x 95' long (Standard: 4' x 50' roll) 200 sq. ft. minimum order	<b>Only Stocked Colors</b> Avalanche 424-7 Granite Grey 424-73 Grizzly 424-17  Check availability with your rep for other listed colors.	4mm (3/16") Thick 8mm (5/16") Thick
Square Tile 24" x 24" 200 sq. ft. minimum order @ 4 sq. ft./Tile	<b>Only Stocked Colors</b> Avalanche 424-7 Granite Grey 424-73 Grizzly 424-17  Check availability with your rep for other listed colors.	4mm (3/16") Thick 8mm (5/16") Thick
Interlocking Tiles 24" x 24" 200 sq. ft. minimum order @ 4 sq. ft./Tile	<b>Only Stocked Colors</b> Avalanche 424-7 Granite Grey 424-73 Grizzly 424-17  Check availability with your rep for other listed colors.	4mm (3/16") Thick 8mm (5/16") Thick

LEED-NC

MR Credit 4 | IEQ Credits 4.1, 5

## MAINTENANCE

For maintenance visit [www.porticosystems.com](http://www.porticosystems.com)

experience it for yourself

Talk with your sales representative or request [samples at samples@porticosystems.com](mailto:samples@porticosystems.com)

## IMPORTANT NOTICE

Sample swatches have been cut from an overall design; decoration and shade may vary.

## LIMITED WARRANTY

Full Commercial Warranty

5 years

Summary of Warranty

Products must be professionally installed to validate the warranty.

Portico Systems warrants Elements 950 Series against wear for a period of 5 years in a commercial application. This warranty applies only to material that is properly installed and maintained, while being used as intended and recommended. If the defect is covered by this warranty and is reported to Portico Systems within the warranty period, Portico Systems will supply new material of same or similar grade to repair or replace the defective material.

### Wear

Defined as complete removal of wear layer, pattern and color due to wear from normal traffic and maintenance. If the wear occurs within 5 years from date of purchase, Portico Systems will provide replacement materials or repair, of only the effected area.

### Manufacturing Defects

Portico Systems warrants Elements 950 Series materials are free from manufacturing defects and will replace defective floor covering and reasonable installation costs for a period of up to one (1) year from date of purchase. Portico Systems will not pay labor costs to repair or replace materials that defects were apparent before or at the time of installation.

### Other Limitations

- This warranty is non-transferable.
- Manufacturing defect must be reported within 3 months from date of purchase.
- This warranty covers only properly installed & maintained floors.
- Portico Systems excludes and will not pay for any consequential or incidental expenses.
- Portico Systems reserves the right of final judgment and may refuse claims in certain instances.

\*For a copy of the full warranty please ask for a warranty sheet

## INITIAL CLEANING

Do not wash floor for at least 5 days after installation. An initial cleaning needs to be done to remove any dirt and grit from the job site and to prepare the floor prior to applying a sealer or finish. Failure to clean properly will cause finish bonding issues as well as the entrapment of dirt in the floor.

To avoid possible damage to the flooring, the following should never be used on the floor:

- Steel wool or abrasive brushes
- Abrasive or alkaline cleaners
- Solvents of any type

YOUR AUTHORIZED SALES REPRESENTATIVE:

